



DAFIBRE EP 155

Rectangular conductor of copper, covered with glassfibre yarn and epoxy, class 155

Product name:

Dafibre EP 155 1
Dafibre EP 155 2

Specifications:

Internal LWW or customer specification

UL approval:

Not approved

Class: 155

Temperature index $\geq 155^{\circ}\text{C}$ acc. to experience
Heat shock: $\geq 175^{\circ}\text{C}$

Insulation:

1- 2 layers of glass-fibre yarn
Impregnation: Polyurethane
Adhesive layer: Epoxy

Properties:

- Excellent resistance to mechanical stress
- B-stage cured epoxy layer allows pre-pressing of windings

Field of application:

- Stator coils
- Large generators
- Electric motors

Standard packaging:


K500, VM630

Shelf life:

6 month, under normal ambient conditions

Conductor material

EN 1977 - ETP1 CW003 A
EN 1977 - ETP CW004A
ASTM B49 - ETP C11000/C11040

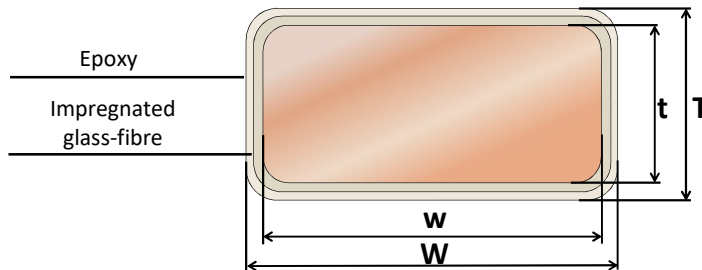

T - t = Increase in thickness

W - w = Increase in width

Conductor corner radius

Nominal thickness of conductor (mm)		Corner radius (mm)	Tolerance
Over	Up to and including		
-	1,00	0,5 nominal thickness	+/- 25%
1,00	1,60	0,50	+/- 25%
1,60	2,24	0,65	+/- 25%
2,24	3,55	0,80	+/- 25%
3,55	-	1,00	+/- 25%

Conductor tolerances

Nominal width or thickness of the conductor (mm)		Tolerance +/- (mm)
Over	Up to and including	
-	3,15	0,030
3,15	6,30	0,050
6,30	12,50	0,070
12,50	-	0,100

Certified according to ISO 9001, IATF 16949, ISO 14001

DAFIBRE EP 155

Rectangular conductor of copper, covered with glassfibre yarn and epoxy, class 155

Insulation increase


Designation	Nominal width of conductor	Increase in thickness	Increase in width
Dafibre EP 155 1	$2,00 \leq w \leq 3,15$	$0,16 \pm 0,04$	max. 0,20
	$3,15 < w \leq 6,30$	$0,18 \pm 0,04$	max. 0,22
	$6,30 < w \leq 12,50$	$0,21 \pm 0,05$	max. 0,26
	$12,50 < w \leq 20,50$	$0,24 \pm 0,06$	max. 0,30
Dafibre EP 155 2	$2,00 \leq w \leq 3,15$	$0,27 \pm 0,06$	max. 0,33
	$3,15 < w \leq 6,30$	$0,30 \pm 0,07$	max. 0,37
	$6,30 < w \leq 12,50$	$0,35 \pm 0,08$	max. 0,43
	$12,50 < w \leq 20,50$	$0,39 \pm 0,08$	max. 0,47

Properties for DAFIBRE EP 155

Main characteristics	Test method	Interval	Acceptance criteria
Electrical properties			
Conductor resistance	IEC 60851 - 5.3	1)	$0,01724 \Omega \text{mm}^2/\text{m}$
Conductivity	1/R	1)	$> 58 \text{ m}/(\Omega \text{mm}^2)$
Breakdown voltage	IEC 60851 - 5.4	All sizes	350 V
- Dafibre EP 155 1 - Dafibre EP 155 2			560 V
Mechanical properties			
Elongation	IEC 60851-3.3	$1,00 \leq t \leq 2,50$	$\geq 30\%$
		$t > 2,50$	$\geq 32\%$
Springback angle	IEC 60851-3.4	All sizes	$\leq 5,5^\circ$
Flexibility	IEC 60851-3.5	$w \leq 8 \text{ mm}$	10 x width
- Bending edgewise		$w > 8 \text{ mm}$	15 x width
- Bending flatwise		All sizes	10 x thickness
Adherence	IEC 60851-3.5	All sizes	10 % stretch, no loss of adhesion
-Stretch			

1. Dependence of dimension is expressed by the unit

Dimension range

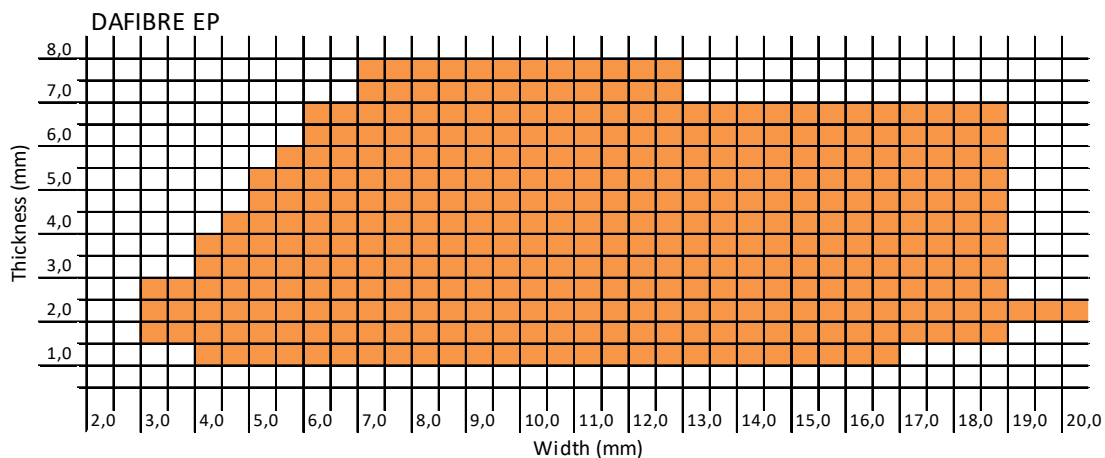

The technical data included is up to date at the time of printing.

LWW reserves the right to make any amendments deemed necessary. Ed.A(2)